



DESCRIPTION

The Beak Suspension's adjustable cylinder directs and projects a beam of direct light. Its smooth, burnished brass finish is accented by knurling on the head, adding visual rhythm to the structure. Supported by a central rod that lends verticality to the composition, Beak Suspension is available in both a standard and Flat version with a reduced-thickness canopy. The Beak collection also includes Ceiling/Wall, Floor, and Table models.

PRODUCTS DETAILS	FUNCTION	SUSPENSION
	LOCATION	INTERIOR
	LIGHT EMISSION	DIRECTIONAL LIGHT
	LIGHT SOURCE	COB LED CLU703 6W 724lm 700mA 9V CRI90 2700°K
	ENERGY EFFICIENCY	F
	RATED VOLTAGE	110 - 120 V / 220 - 240 V
	FREQUENCY	50 - 60Hz
	SUPPLY	BEAK SUSPENSION TERMINAL BLOCK
		BEAK SUSPENSION FLAT REMOTE TERMINAL BLOCK
	LENS SPOT BEAM	18° - 36° - 60°
	BEAK SUSPENSION: DALI OR TRIAC DIMMING KIT AVAILABLE UPON REQUEST.	
	BEAK SUSPENSION FLAT: DALI OR TRIAC REMOTE DIMMING KIT AVAILABLE UPON REQUEST.	

CERTIFICATION	<div>UL / <small>WIRED</small> C E   IP20</div>
---------------	---


MATERIALS	STRUCTURE	
	M11	LIGHT BURNISHED BRASS
	M12	DARK BURNISHED BRASS

PACKAGE	QTY	DIMENSIONS	NET WEIGHT	GROSS WEIGHT	TOTAL VOL.
	-	-	-	-	-


DIMENSIONS

BEAK SUSPENSION

STANDARD

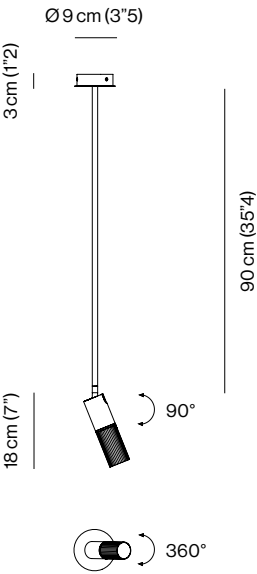


J-BOX KIT

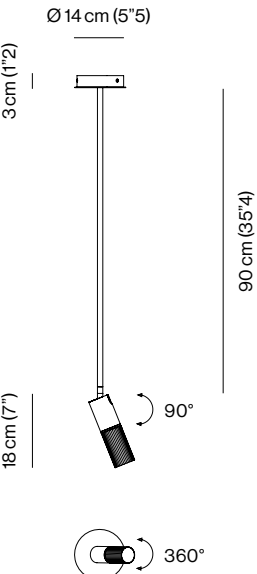

BEAK SUSPENSION FLAT

STANDARD

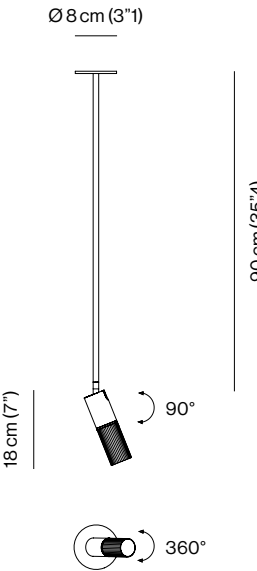

J-BOX KIT

