

DESCRIPTION Kitami LED Wall interprets an asymmetrical sign where two metal rods intersect in a rigorous construction. Integrated LEDs along the profiles generate a defined direct light that flows across the surfaces, emphasizing the geometry. The lamp is offered in two mirrored variants, designed to adapt to the space. Kitami is also available in a LED Suspension version.

PRODUCTS DETAILS	FUNCTION	WALL
	LOCATION	INTERIOR
	LIGHT EMISSION	DIFFUSED LIGHT
	LIGHT SOURCE	STRIP LED 11,5W/m 2700°K 2000lm/m CRI 90+ 24Vdc TOT. = 12,5W 2166lm
	ENERGY EFFICIENCY	C
	RATED VOLTAGE	110 - 120 V / 220 - 240 V
	FREQUENCY	50 - 60Hz
	SUPPLY	TERMINAL BLOCK
	BALLAST	BALLAST INCLUDED

DALI or TRIAC dimming kit available upon request.

CERTIFICATION



MATERIALS


STRUCTURE	
M04	POLISHED BLACK NICKEL
M07	MATTE BLACK NICKEL
M11	LIGHT BURNISHED BRASS

PACKAGE

QTY	DIMENSIONS	NET WEIGHT	GROSS WEIGHT	TOTAL VOL.
1 x BOX	83 x 44 x H 34 cm (32"7 x 17"3 x H 13"4)	4 kg	5 kg	0,12 m ³

DIMENSIONS

LEFT

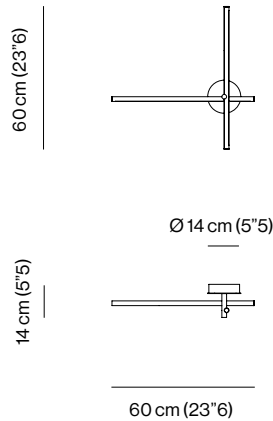

RIGHT

